
# DMG40400F016\_06WTCZ02

#### Features:

- Based on T5L0-Q88, running DGUS II system.
- 1.6-inch, 400\*400 Pixels resolution, 262K Colors, IPS circular LCD , Wide viewing angle.
- Optical bonding capacitive touch panel, integrated black cover plate.
- COF structure. The entire core circuit of the smart screen is fixed on the FPC of LCM, featured by light and thin structure, low cost and easy production.





#### 1 External Interface

PIN	Definition	Туре	Functional Description		
1	+5V	P	Dower cumply $DC4 = EEV$		
2	+5V		Power supply, DC4.5-5.5V		
3	RX2	I	UART2 Input		
4	TX2	0	UART2 Output		
5	RX1	I	UART1 Input		
6	TX1	0	UART1 Output		
7	SPK	0	External MOSFET to drive buzzer or speaker		
8	GND				
9	GND	Р	GND		
10	GND				

# **2** Specification Parameters

### **2.1 Product Parameters**

Main Chip	T5L0-Q88*2
User Interface	10Pin_1.0mm FPC
FLASH	16M Bytes
UI Version	DGUSII / TA
Power Supply	HDL662K adapter board power supply
Display Color	262K colors
Dimensions	1.6-inch
Resolution	400*400
Active Area	39.84mm (W)×39.84mm (H)
View Area	39.84mm (W)×39.84mm (H)
Viewing Angle	IPS wide viewing angle, 85°/85°/85° (L/R/U/D)
Backlight Service Life	>10000 hours (Time of the brightness decaying to 50% on the condition of continuous working with the maximum brightness)
Brightness	50nit
Brightness Control	0~100 grade (When the brightness is adjusted to 1%~30% of the maximum brightness, flickering may occur and is not recommended to use in this range)
ТР Туре	CTP (Capacitive Touch Panel)
TP Structure	G+FF structure
Touch Mode	Single point touch, support continuous sliding touch
Surface Hardness	6Н
Light Transmittance	Over 30%
Life	Over 1,000,000 times touch

2.2 Interface Parameters							
ltem	Conditions	Min	Тур	Max	Unit		
Baud Rate	User Set(Configure the CFG file)	3150	115200	3225600	bps		
Output	Output 1	3.0	3.3	-	V		
Voltage(TXD)	Output 0	-	0	0.3	V		
Input	Input 1	-	-	3.3	V		
Voltage(RXD)	Input 0	0	-	0.5	v		
Interface	UART1: TTL; UART2: TTL;						
Data Format	N81						

# 2.3 Electrical Specifications

Rated Power	<2W				
Operating Voltage	4.5~5.5V, typical value	of 5V			
Operating Current	160mA	VCC=5V, max backlight			
Operating Current	80mA	VCC=5V, backlight off			
Recommended power supply: 5V 1A DC					

# 2.4 Operating Environment

Operating Temperature	-10℃~60℃ (5V @ 60% RH)
Storage Temperature	-20℃~70℃
Operating Humidity	10%~90%RH, typical value of 60% RH

)

# 3 Reliability Test

Before mass production of smart screens, a series of procedural reliability tests need to be conducted according to actual application requirements and product specification control standards to ensure product quality.

#### 3.1 ESD Test

Test temperature: 25°C

Test standard : EN 61000-4-2:2009 ☑IEC 61000-4-2:2008 Other:

GB/T 17626.2-2018

Table 1: Electrostatic Discharge Immunity (Air Discharge) **Test Levels Test Points Locations** -2kV +2kV -4kV +4kV -8kV +8kV -15kV +15kV Screen 1 1 A A 1

Table 2: Electrostatic Discharge Immunity (Direct Contact)

Test Deinte Lesstians				Test L	evels			
Test Points Locations	-2kV	+2kV	-4kV	+4kV	-6kV	+6kV	-8kV	+8kV
Border	/	1	/	1	1	1	/	1
. /	/	/	/		/	/	/	1
1	/	1	K	$\langle I \rangle$	1	1	/	1

**DWIN Technology** 

# 3.2 High and Low Temperature Test

Test temperature:-20~70℃

Test process: the product will be placed obliquely in the high and low temperature test chamber for 12h for 20 on and off cycles. Then it will be check at room temperature after power on for the appearance and function, CTP offset situation, jumping point, page random switching and failure.

Temperature	Result
High temperature (70°C)	A
Low temperature (-20°C)	A

#### **Performance Criterion:**

A. Normal performance within limits specified by the manufacturer, requestor or purchaser;

B. Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and


from which the equipment under test recovers its normal performance, without operator intervention;

C. Temporary loss of function or degradation of performance, the correction of which requires operator intervention;

D. Loss of function or degradation of performance which is not recoverable, due to damage to hardware or software, or loss of data.

# 4 Debug

It is recommended for new users of DWIN smart LCMs to purchase official accessories. For more details, please refer to customer service center.

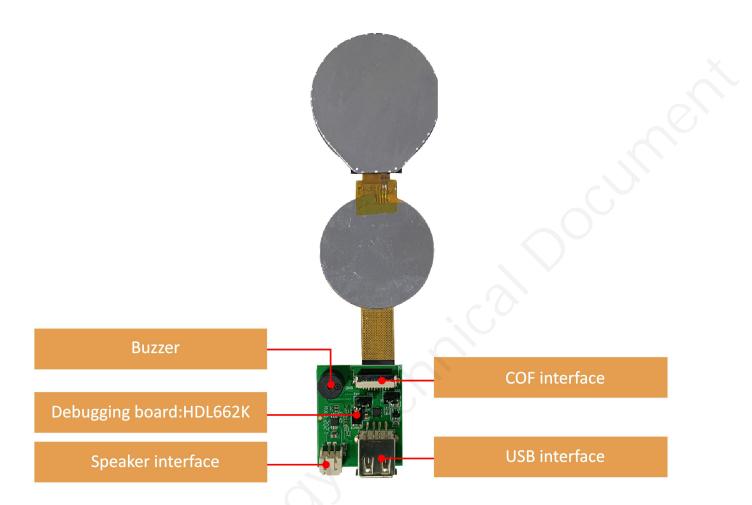

Please pay attention to the wiring sequence between the debugging board and the COF screen, do not reverse connect.

Operation steps: open serial assistant - custom function command - set command - send.

For example:

(1) Page switching

Tx: 5AA5 07 82 0084 5A01 0008

- (2) Standby backlight setting
  - Tx: 5AA5 07 82 0082 64 32 03E8

竺■ 差 A. @ 影 三 セ キ 4		# 123 🖻 🛅 () 🕑 ≫ 🧖 @ 1. 77 %		livel.	<b>2</b>			
a == 24 - 46 - 4	8 × 8	Home 00.bmp						
		DwinPCKits		-				0
1 Fictures	00							
: 00.bmp		Log			instructions	*		
				Syst	m function instruction	Custon function instructions		
				Γ	function	Custom instruction	send	cycle
				1	Write variable space	5a a5 04 82 10 00 01 22 33	send	
				2	Read variable space	5a a5 04 83 10 00 02	send	
				3	CPU reset	5a a5 07 82 00 04 55 aa 5a a5	send	
				4	Page switching	5AA5 07 82 0084 5A01 0008	send	
				5	Standby backlight setting	5AA5 07 82 0082 64 32 03E8	send	
				6			send	
				7			send	
				8			send	
				9			send	
				10			send	
				11			send	
				12			send	
				13			send	
				14			send	
				15			send	
			[and the second s		stonatic loop send interv	al 1000 🗣 es		
		2	Clear Log					
		Serial Fort Setting	Serial Port Order					
		Serial Fort Number COM2	O Write VP		VP Address Ox 0	VT Length/Word On 1 0		
		Baud Bate 115200						

# **DGUS** operation

#### 5 T5L0-Q88 ASIC

T5L0 Q88 ASIC is a small package, low-power, cost-effective, GUI and application highly integrated single-chip dual-core ASIC designed by DWIN Technology for small-size LCD and mass produced in 2023.

(1) Mature and stable 8051 core which is the most widely used with the maximum operating frequency of T5L is

up to 400MHz, 1T(single instruction cycle)high speed operation.

(2) Separate GUI CPU core running DGUS II System:

- High-speed display memory, 2.4GB/S bandwidth. 18-bit color display resolution support up to 1024\*768 (TA mode), 854\*480 (DGUS mode).
- 2D hardware acceleration and the UI with animation and icons as its main feature is extremely cool and smooth.
- Images and icons stored in JPEG format. Adopt Low-cost 16Mbytes SPI Flash.
- High quality ratio and sound restoration and playback.
- 128Kbytes variable storage space for exchanging data with OS CPU Core and memory.
- 2 10-bit 800KHz DC/DC controllers simplify LED backlight, analog power design and save cost and space.
- Support DGUS development and simulation on PC. Support backend remote upgrade.

(3) Separate CPU (OS CPU) core runs user 8051 code or DWIN OS system and user CPU is omitted in

practical application:

- Standard 8051 core and instruction set, 64Kbytes code space, 32Kbytes on-chip RAM.
- 64-bit integer mathematical operation unit (MDU), including 64-bit MAC and 64-bit divider.
- 15 IOs, 4-channel UARTs, 1-channel CAN, up to 8-channel 12-bit A/Ds and 2-channel 16-bit PWM of adjustable resolution.
- Support IAP online simulation and debugging with unlimited breakpoints.
- Upgrade code online through DGUS system.
- (4) 1Mbytes on-chip Flash with DWIN patent encryption technology ensure code and data security.


(5) Operating temperature ranges from -40  $^{\circ}$ C to +85  $^{\circ}$ C (IC operating temperature customizable from -55  $^{\circ}$ C to 105  $^{\circ}$ C).

DWIN encourages users to design your own customized product based on T5L.

# 6 Packing Capacity & Dimension

Dimension						
Dimension	53.00(W) ×53.00(H) ×4.16(T) mm					
Net Weight	25g					
Packing Capacity						
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)		
Carton1:	220mm(L)×160mm(W)×47mm(H)	-	-			
Carton2:	250mm(L)×200mm(W)×80mm(H)	-	-	<u> </u>		
Carton3:	320mm(L)×270mm(W)×80mm(H)	-	~0	-		
Carton4:	450mm(L)×385mm(W)×205mm(H)	-	-	100		

Disclaimer: The product design is subject to alternation and improvement without prior notice.

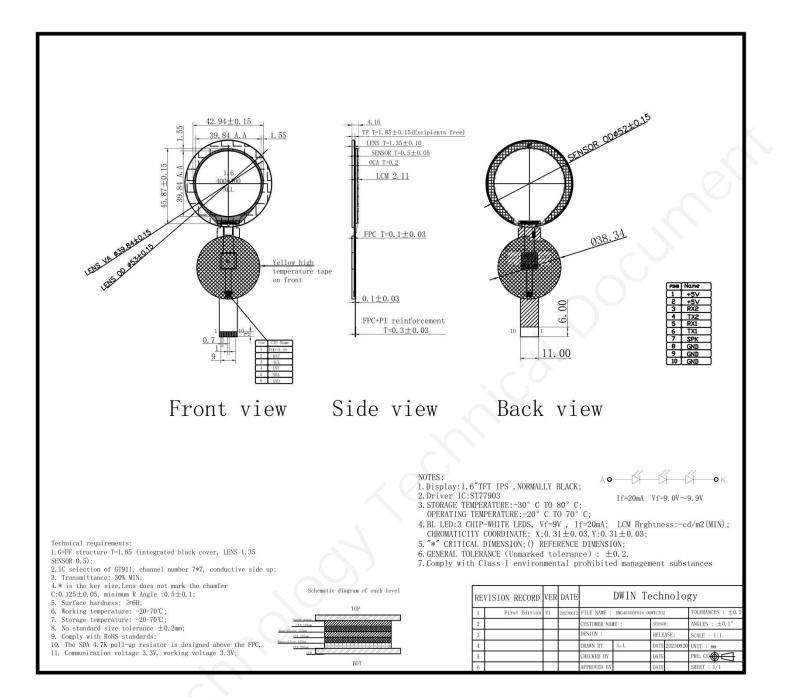

#### 7 Revision records

Rev	Revise Date	Content	Editor
00	2023-10-24	First Edition	Xu Ying
01	2023-12-07	Adjusting accessories	Xu Ying

Please contact us if you have any questions about the use of this document or our products, or if you would like to

know the latest information about our products:

- Customer service Tel: +86 400 018 9008
- Customer service email: dwinhmi@dwin.com.cn
- DWIN Developer Forum: <u>https://forums.dwin-global.com/</u>

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!