

CI0619S 规格书

CI0619S Datasheet

型号 / MODEL NO: CI0619S

版本 / SPEC VERSION: V00

日期 / ISSUED DATE: 2021-11-09

编 辑 Prepared by	审 核 Checked by	批 准 Approved by
欧阳开杏	陈春妮	张庆钊

本技术规格如有更改，恕不另行通知

This technical specification is subjected to change without notice

修订记录 / Record of Revision



[illegible]

Note:




1. Material:

- * Insulation: Nylon 6T with 30% GF, 94V-0, Color Nature(Halogen-Free)
 - * Contact: Brass with Matte Tin plated
 - * TAB: Brass with Matte Tin plated
2. For Lead Free IR Reflow Process

Dim	TOLERANCE		
	Circuits	2~6P	7~10P
A		± 0.10	± 0.15

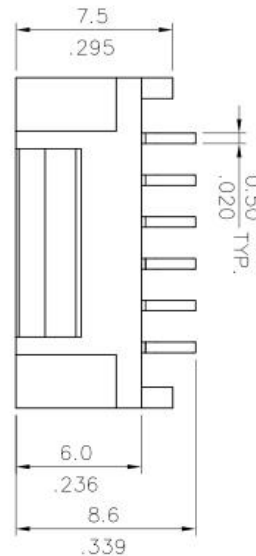

SEC.:X-X

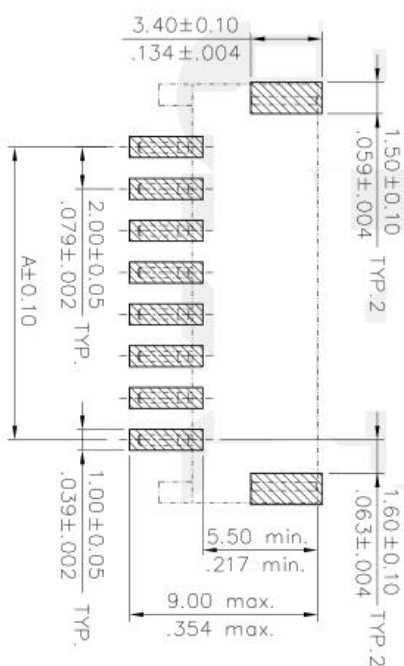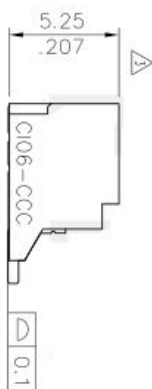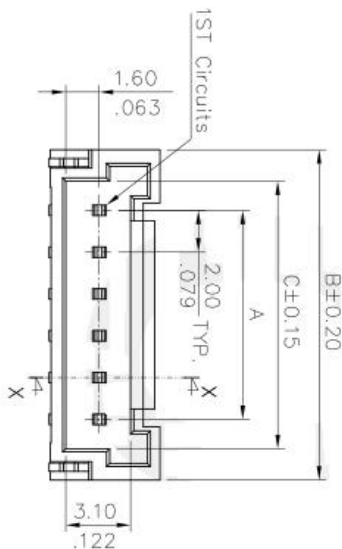

- A = 2.00 x No. of Spaces
- B = A + 5.8
- C = A + 2.8
- * Available in 2 through 16 circuits

Ordering Code:

CI06 ** M 1 H * 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- Series No.
- No. of Circuits:
- Contacts Type: M = SMT
- Plating: 1 = 3.05μm(120u") Min. Matte Tin over 1.27μm(50u") Nickel
- Type: H = Right angle
- Packing Options:
R = Tape & Reel
T = Tube Packing
- Option: 0 = Standard
- NH = For Lead Free IR Reflow Process and Halogen-Free

Halogen-Free

Lead Free Process

RoHS compliant

Rev	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TOLERANCE UNLESS OTHERWISE SPECIFIED	TITLE: 2.00mm PITCH SIDE ENTRY SMT HEADER	DRAWING NO.	PART NO.	SHEET	OF
4	3/8-13'	ECN13056-0/ECR13007-1	Enyo	3/08-13'				CI0619SE	CI06**M1H*0-NH	1	2
3	6/18-10'	ECN10211	Enyo	3/09-13'							
2	6/9-10'	ECN10194	Eisley	3/09-13'							
1	3/30-10'	ECN10088	Eisley	3/09-13'							